



PROFI FLOOR

Specijalna izolacija za vinil
LVT click podne obloge

VINIL CLICK ANTISLIP




Pogodno i za podno grijanje.

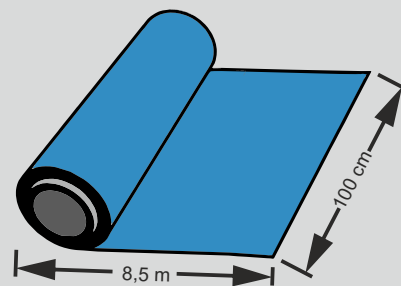

1,2 mm

Količina: 8,5 m²



VINIL CLICK ANTISLIP

Polietilenska podloga velike gustoće s anti-slip (protukliznim) slojem za LVT podne obloge na klik sistem.

- Štiti klik spoj, daje zvučnu i toplinsku izolaciju.
- Preporuča se kao izolacija za podno grijanje i za druge vrste obloga.
- Može se 100% reciklirati, ekološki prihvatljiv proizvod.
- Ne sadrži štetna VOC isparavanja, ima A+ certifikat kvalitete zraka u zatvorenim prostorijama.

Symbol	Category	Value / Unit	Test methods
T	Thikness	1,2 mm ± 10%	En823
L	Length	8500 mm ± 4%	En822
W	Width	1000 mm ± 2%	En822
AW	Area weight	0,21 kg/m ² ± 10%	EN ISO23997:2012
QW	Density	130 kg/m ² ± 10%	EN ISO23996:2012
RWS	Reflected walking sound	8 % ± 2	IHD - W 431
IS	Impact sound reduction	16 dB ± 2	EN ISO10140, ISO717 - 2
CS	Temporary loads resistance	200 kPa ± 10	EN826:2013 +A: FU1:2019
CC	Static loads (furniture) resistance	>50 kPa	En1606
DL	Dynamic loads (walking) resistance	>100 000 cycles	En13793
PC	Local unevenness compensation	0,95 mm ± 10%	EN-ISO868
TR	Thermal insulation	0,024 m ² K/W ± 0,003	EN12667:2002 at 24 °C
SD	Protection agains moisture	<75 m	En12086
RLB	Protection against falling objects	800 mm ± 50	En13329, EN 438
RTF	Reaction to fire	---	EN ISO11925-2, PN-EN13501-1



OLUK d.o.o.
Svetog križa 1
Branjin Vrh
Hrvatska
+385 31 727 519

